



3D Shape Engineering and Design Parameterization

Kuang-Hua Chang¹ and Chienchih Chen²

¹University of Oklahoma, khchang@ou.edu

²University of Oklahoma, chienchih.chen-1@ou.edu

ABSTRACT

This paper presents a brief review and technical advancement on 3D shape engineering and design parameterization in reverse engineering, in which discrete point clouds are converted into feature-based parametric solid models. Numerous efforts have been devoted to developing technology that automatically creates NURBS surface models from point clouds. Only very recently, the development was extended to support parametric solid modeling that allows significant expansion on the scope of engineering assignments. In this paper, underlying technology that enables such advancement in 3D shape engineering and design parameterization is presented. Software that offers such capabilities is evaluated using practical examples. Observations are presented to conclude this study.

Keywords: reverse engineering, design parameterization, auto-surfacing.

DOI: 10.3722/cadaps.2011.681-692

1 INTRODUCTION

3D scanning technology has made enormous progress in the past 25 years [1]; especially, the non-contact optical surface digitizers. These scanners or digitizers become more portable, affordable; and yet capturing points faster and more accurately. A hand-held laser scanner captures tens of thousands points per second with a level of accuracy around 40 μm , and can cost as low as fifty thousand dollars, such as a ZScanner 800 [2]. Such technical advancement makes the scanners become largely accepted and widely used in industry and academia for a broad range of engineering assignments. As a result, demand on geometric modeling technology and software tools that support efficiently processing large amount of data points and converting them into useful forms, such as NURBS (non-uniform rational B-spline) surfaces, become increasingly higher.

Auto-surfacing technology that automatically converts point clouds into NURBS surface models has been developed and implemented into commercial tools, such as *Geomagic* [3], *Rapidform* [4], *PolyWorks* [5], *SolidWorks/Scan to 3D* [6], among many others. These software tools have been routinely employed to create NURBS surface models with excellent accuracy, saving significant time and effort. The NURBS surface models are furnished with geometric information that is sufficient to support certain types of engineering assignments in maintenance, repair, and overhaul (MRO) industry, such as part inspection and fixture calibration. The surface models support 3D modeling for bioengineering and medical applications, such as [7-10]. They also support automotive industry and aerospace design [11]. **NURBS surface models converted from point clouds have made tremendous**

contributions to wide range of engineering applications. However, these models contain only surface patches without the additional semantics and topology inherent in feature-based parametric representation. Therefore, they are not suitable for design changes, feature-based NC toolpath generations, and technical data package preparation. Part re-engineering that involves design changes also requires parametric solid models.

Shape engineering and design parameterization aims at creating fully parametric solid models from scanned data points and exporting them into mainstream CAD packages that support part re-engineering, feature-based NC toolpath generations, and technical data package preparation. Although, converting data points into NURBS surface models has been automated, creating parametric solid models from data points cannot and will not be fully automated. This is because that, despite technical challenges in implementation, the original design intent embedded in the data points must be recovered and realized in the parametric solid model. Modeling decisions have to be made by the designer in order to recover the original design intents. However, designers must be relieved from dealing with tedious point data manipulations and primitive geometric entity constructions. Therefore, the ideal scenario is having software tools that take care of labor intensive tasks, such as managing point cloud, triangulation, etc., in an automated fashion; and offer excellent capabilities to allow designers to recover design intents interactively. Such an ideal scenario has been investigated for many years. After these many years, what can be done with the technology and tools developed up to this point? Many papers already address auto-surfacing. In this paper, we will focus on solid modeling and design parameterization.

2 DESIGN PARAMETERIZATION

One of the common approaches for searching for design alternatives is to vary the part size or shape of the mechanical system. In order to vary part size or shape for exploring better design alternatives, the parts and assembly must be adequately parameterized to capture design intents.

At the parts level, design parameterization implies creating solid features and relating dimensions so that when a dimension value is changed the part can be rebuilt properly and the rebuilt part revealed design intents. At the assembly level, design parameterization involves defining assembly mates and relating dimensions across parts. When an assembly is fully parameterized, a change in dimension value can be automatically propagated to all parts affected. Parts affected must be rebuilt successfully, and at the same time, they will have to maintain proper position and orientation with respect to one another without violating any assembly mates or revealing part penetration or excessive gaps. For example, in a single-piston engine shown in Fig. 1. [12], a change in the bore diameter of the engine case will alter not only the geometry of the case itself, but also all other parts affected, such as the piston, piston sleeve, and even the crankshaft. Moreover, they all have to be rebuilt properly and the entire assembly must stay intact through assembly mates, and faithfully reveal design intents.

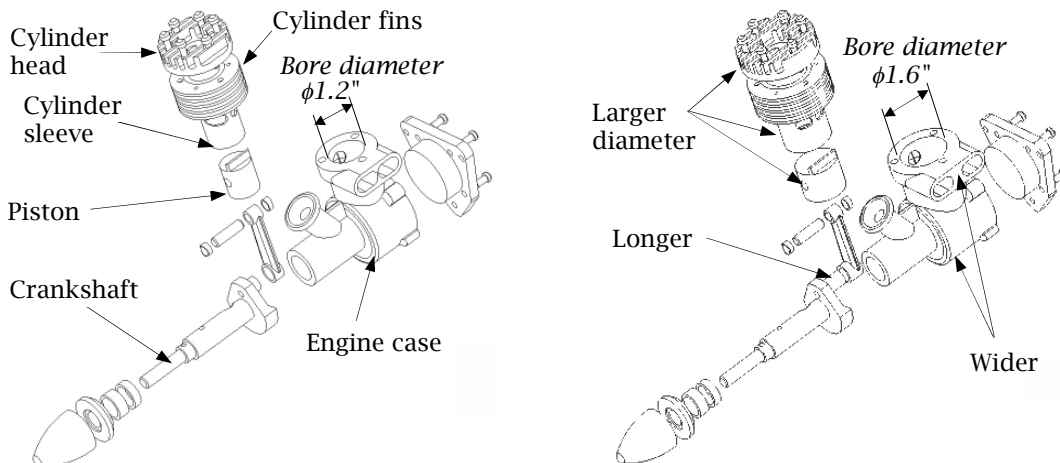


Fig. 1: A single-piston engine—exploded view, (a) bore diameter 1.2", and (b) bore diameter 1.6".

3 SHAPE ENGINEERING

The overall process of shape engineering and parametric solid modeling is shown in Fig. 2., in which four main phases are involved. They are (1) triangulation that converts data points to polygon mesh, (2) mesh segmentation that separates polygon mesh into regions based on the characteristics of the surface geometry they respectively represent, (3) solid modeling that converts segmented regions into parametric solid models, and (4) model translation that exports solid models constructed to mainstream CAD systems. Note that it is desired to have the entire process fully automated; except for Phase 3. This is because that, as stated earlier, Phase 3 requires designer's interaction mainly to recover original design intents. These four phases are briefly discussed in the following subsections.

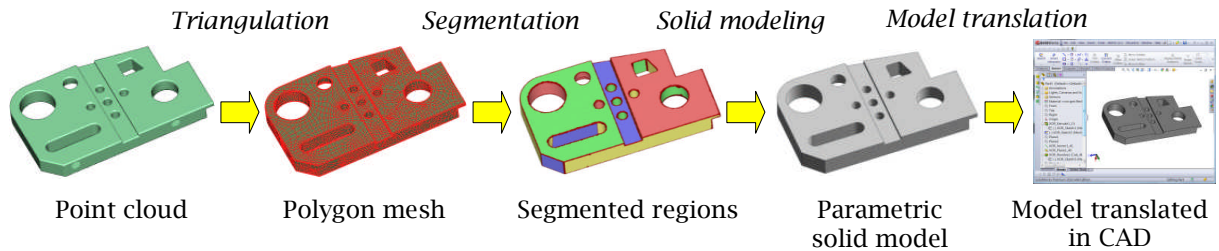


Fig. 2: General process of shape engineering and parametric solid model construction.

3.1 Triangulation

The mathematic theory and computational algorithms for triangulation have been well developed in the past few decades. A polygon mesh can be automatically and efficiently created for a given set of data points. The fundamental concept in triangulation is Delaunay triangulation. In addition to Delaunay triangulation, there are several well-known mathematic algorithms for triangulation, including marching cubes [13], alpha shapes [14], ball pivoting algorithm (BPA) [15], Poisson surface reconstruction [16], moving least squares [17], etc. A few high profile projects yield excellent results, such as sections of Michelangelo's Florentine Pietà composed of 14M triangle mesh generated from more than 700 scans [15], reconstruction of "Pisa Cathedral" (Pisa, Italy) from laser scans with over 154M samples [17], and head and cerebral structures (hidden) extracted from 150 MRI slices using marching cubes algorithm (about 150,000 triangles), as shown in Fig. 3.



Fig. 3: Sample projects of scanning and triangulation, (a) Michelangelo's Florentine Pietà, (b) Pisa Cathedral, and (c) head and cerebral structures.

3.2 Segmentation

One of the most important steps in shape engineering is mesh segmentation. Segmentation groups the original data points or mesh into subsets each of which logically belongs to a single primitive surface.

In general, segmentation is a complex process. Often iterative region growing techniques are applied [18-20]. Some use non-iterative methods, called direct segmentation [21], that are more efficient. In general, the segmentation process, such as [22], involves a fast algorithm for k -nearest neighbors search and an estimate of first- and second-order surface properties. The first-order segmentation, which is based on normal vectors, provides an initial subdivision of the surface and

detects sharp edges as well as flat or highly curved areas. The second-order segmentation subdivides the surface according to principal curvatures and provides a sufficient foundation for the classification of simple algebraic surfaces. The result of the mesh segmentation is subject to several important parameters, such as the k value (number of neighboring points chosen for estimating surface properties), and prescribed differences in the normal vectors and curvatures (also called sensitivity thresholds) that group the data points or mesh. As an example shown in Fig. 4(a), a high sensitive threshold leads to scattered regions of small sizes, and a lower sensitive threshold tends to generate segmented regions that closely resemble the topology of the object, as illustrated in Fig. 4(b).

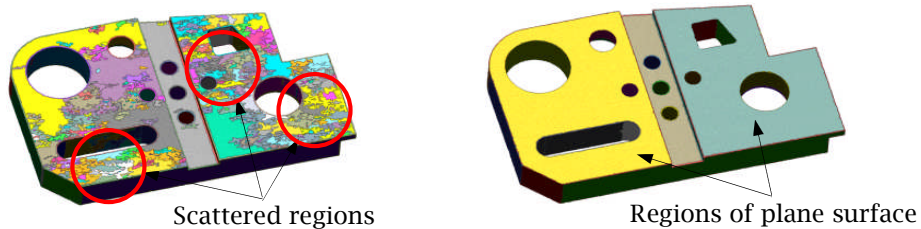


Fig. 4: Example of mesh segmentation, (a) an object segmented into many small regions due to a high sensitivity threshold, and (b) regions determined with a low sensitivity threshold.

Most of the segmentation algorithms come with surface fitting, which fits best primitive surface of an appropriate type to each segmented regions. It is important to specify a hierarchy of surface types in the order of geometric complexity, similar to that of Fig. 5. [23]. In general, objects are bounded by relatively large primary (or functional) surfaces. The primary surfaces may meet each other along sharp edges or there may be secondary or blending surfaces which may provide smooth transitions between them.

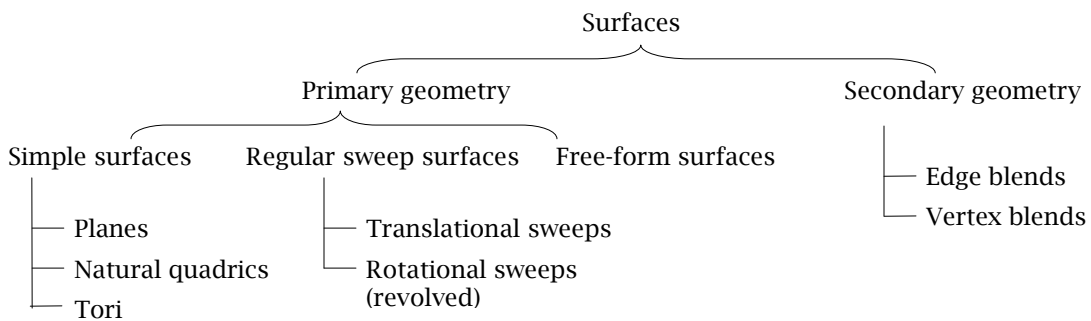


Fig. 5: A hierarchy of surfaces.

As discussed above, feature-based segmentation provides a sufficient foundation for the classification of simple algebraic surfaces. Algebraic surfaces, such as planes, natural quadrics (such as sphere, cylinders, and cones), and tori, are readily to be fitted to such regions. Several methods, including [24], have been proposed to support such fitting, using least square fitting.

In addition to primitive algebraic surfaces, more general surfaces with a simple kinematic generation, such as sweep surfaces, revolved surfaces (rotation sweep), extrusion surfaces (translation sweep), pipe surfaces, are directly compatible to CAD models. Fitting those surfaces to segmented data points or mesh is critical to the reconstruction of surface models and support of parameterization [25].

In some applications, not all segmented regions can be fitted with primitives or CAD-compatible surfaces within prescribed error margin. Those remaining regions are classified as freeform surfaces, where no geometric or topological regularity can be recognized. These can be a collection of patches

or possibly trimmed patches. They are often fitted with NURBS surfaces. Many algorithms and methods have been proposed to support NURBS surface fitting, such as [26].

3.3 Solid Modeling

Solid modeling is probably the least developed in the overall shape engineering process. Boundary representation (B-rep) and feature-based are the two basic representations for solid models. There has been some methods, such as [21], proposed to automatically construct B-rep models from point clouds or triangular mesh. Some focused on manufacturing feature recognition for process planning purpose, such as [27]. One promising development in recent years was the geometric feature recognition (*GFR*), which automatically recognizes solid features embedded in B-rep models. However, none of the method is able to fully automate the construction process and generate fully parametric solid models. Some level of manual work is expected.

3.3.1 Boundary Representation

Based on segmented regions (with fitted surfaces), a region adjacent graph is built, which reflects the complete topology and serves as the basis for building the final B-rep model, also called stitched models, where the individual bounded surfaces are glued together along their common edges.

In general, there are three steps involved in constructing B-rep models, flattening, edges and vertices calculations, and stitching [21]. In flattening step, regions are extended outwards until all triangles have been classified. Note that this step is necessary to remove all gaps between regions. Sharp edges can be calculated using surface-surface intersection routines, and vertices where three surfaces meet are also determined. During the process, a complete B-rep topology tree is also constructed. A B-rep model can then be created by stitching together the faces, edges, and vertices. This operation is commonly supported by most solid modeling kernels.

3.3.2 Geometric Feature Recognition

B-rep models are not feature-based. In order to convert a B-rep model into a feature-based solid model, the embedded solid features must be recognized, and a feature tree that describes the sequence of feature creation must be created.

One of the most successful algorithms for geometric feature recognition has been proposed by Venkataraman [28]. The algorithm uses a simple four step process, (1) simplify imported faces, (2) analyze faces for specific feature geometry, (3) remove recognized feature and update model; and (4) return to Step 2 until all features are recognized. The process is illustrated in Fig. 6. Once all possible features are recognized, they are mapped to a new solid model of the part (Fig. 6(d).) which is parametric with a feature tree that defines the feature regeneration (or model rebuild) sequence.

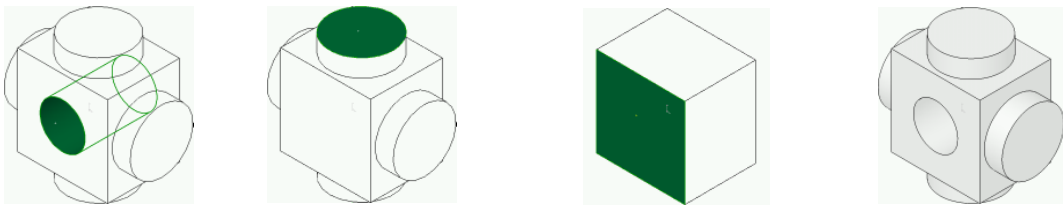


Fig. 6: Illustration of *GFR* algorithm, (a) imported surface model with hole surface selected, (b) hole recognized and removed, extruded face of cylinder selected, (c) cylindrical extrusions recognized, base block extrusion face selected, and (d) all features recognized and mapped to solid model.

Venkataraman's method was recently commercialized by Geometric Software Solutions, Ltd. (GSSL) [29], and implemented in a number of CAD packages, including *SolidWorks* and *CATIA*, capable of recognizing basic features, such as extrude, revolve, and more recently, sweep. This capability has been applied primarily for support of solid model translations between CAD packages with some success, in which not only geometric entities (as has been done by IGES—Initial Graphics Exchange Standards) but also parametric features are translated.

One of the major issues revealed in commercial *GFR* software is design intent recovery. For example, the flange of airplane tubing would be recognized as a single revolve feature, where a sketch is revolved about an axis (Fig. 7(a)). However, current *GFR* implementations are not flexible. As shown in Fig. 7(b), without adequate user interaction, the single sketch flange may be recognized as four or more separate features. While the final solid parts are physically the same, their defining parameters are not. Such a batch mode implementation may not be desired in recovering meaningful design intents.

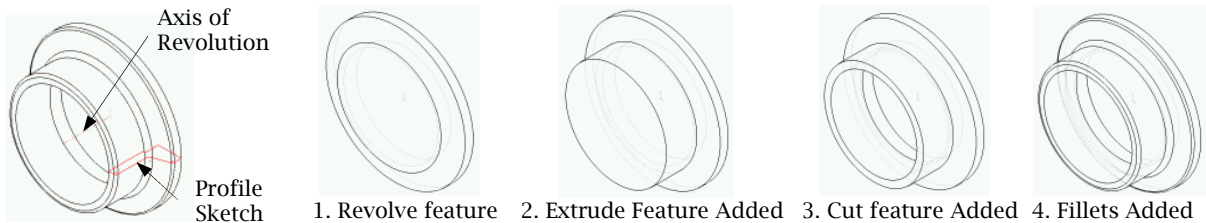


Fig. 7: Feature recognition for airplane tubing flange, (a) single revolved feature, and (b) four features: revolve, extrude, cut, and fillet.

3.3.3 Design Parameterization

A feature-based parametric solid model consists of two key elements: a feature tree, and fully parameterized sketches employed for protruding solid features. A fully parameterized sketch implies that the sketch profile is fully constrained and dimensioned, so that a change in dimension value yields a rebuilt as anticipated with design intents. To the authors' knowledge, there is no such method proposed or offered that fully automates the process. Some capabilities are offered by commercial tools, such as *Rapidform*, that support designers to interactively create fully parameterized sketches, which accurately conform to the data points and greatly facilitates the solid modeling effort.

3.4 Solid Model Translations

Since most of the promising shape engineering capabilities are not offered in CAD packages (more details in the next section), the solid models constructed in these reverse engineering software will have to be exported to mainstream CAD packages in order to support common engineering assignments. The conventional solid model translation via standards, such IGES or STEP AP (application protocols), are inadequate since parametric information, including solid features, feature tree, sketch constraints and dimensions, are completely missing in the translation. Although feature recognition capability offers some relief in recognizing geometric features embedded in B-rep models, it is still an additional step that is often labor intensive. Direct solid model translations have been offered in some software, such as *liveTransfer*TM module of *Rapidform XOR3* and third party software, such as *TransMagic* [30]. More will be discussed for *liveTransfer*TM.

4 ENGINEERING SOFTWARE

The most useful and advanced shape engineering capabilities are offered in specialized, non-CAD software, such as *Geomagic*, *Rapidform*, etc., that are intended to support reverse engineering. Some CAD packages, such as *SolidWorks*, *Pro/ENGINEER Wildfire*, and *CATIA*, offer limited capabilities for shape engineering. In general, capabilities offered in CAD are labor intensive and inferior to specialized codes while dealing with shape engineering.

After intensive review and survey [31], to the authors' knowledge, the best software on the market for reverse engineering is *Geomagic Studio* v.11 and *Rapidform XOR3*. This was determined after a thorough and intensive study, following a set of prescribed criteria including auto-surfacing, parametric solid modeling, and software usability. Between the two, *Geomagic* has a slight edge in geometric entity editing, which is critical for auto-surfacing (construction NURBS surface models). In terms of solid modeling, *Geomagic* stops short at only offering primitive surfaces, such as plane, cylinder, sphere, etc., from segmented regions.

Rapidform is superior in support of solid modeling (in addition to excellent auto-surfacing) that goes beyond primitive surface fitting. *Rapidform* offers convenient sketching capabilities that support feature-based modeling. As a result, it often requires less effort yet yielding a much better solid model by interactively recovering solid features embedded in the segmented regions. The interactive approach mainly involves creating or extracting section profiles or guide curves from polygon mesh, and following CAD-like steps to create solid features; for example, sweep a section profile along guide curves for a sweep solid feature. For example, an airplane sheet metal part was constructed by lofting two end section profiles with four guide curves, as shown in Fig. 8. The loft model is very accurate. As shown in Fig. 8(c), the geometric error in average and standard deviation between the lofted model and the polygon mesh are -0.021 and 0.049 in., respectively (using *Accuracy Analyzer* of *Rapidform*).

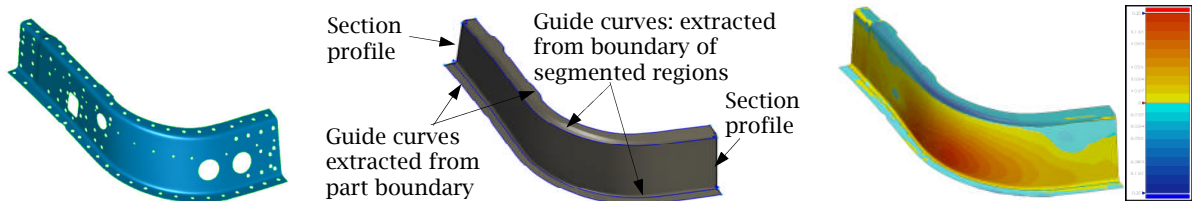


Fig. 8: Lofted model of sheet metal part (16in.×10in.×9in.), (a) polygon mesh of 134,089 polygons, (b) lofted model using two section profiles and four guide curves, and (c) geometric error analysis.

5 TEST EXAMPLES

Focus of the paper is given to feature-based solid modeling. Only selected examples for *Geomagic* and *Rapidform* are presented to illustrate the detailed steps and essential capabilities in the software.

5.1 *Geomagic Studio* v.11

Geomagic automatically recognizes primitive surfaces from segmented regions. If a primitive surface is misrecognized or unrecognizable, users are able to interactively choose the segmented region and assign a correct primitive type. Often, this interactive approach leads to a solid model with all bounding surfaces recognized. Unfortunately, there is no feature tree, and no CAD-like capabilities in *Geomagic*. Users will not be able to see any sketch or dimensions in *Geomagic Studio* v.11. Therefore, users will not be able to edit or add any dimensions or constraints to parameterize the sketch profiles. Section sketches only become available to the users after exporting the solid model to a selected CAD package supported by *Geomagic*.

The block example (3in.×5in.×0.5in.) of 634,957 points shown in Fig. 4. is employed to illustrate the capabilities offered in *Geomagic*. As shown in Fig. 9(a), primitive surfaces in most regions are recognized correctly. However, there are some regions incorrectly recognized; for example, the hole in the middle of the block was recognized as a free-form primitive, instead of a cylinder. There are also regions remained unrecognized; e.g., the middle slot surface.

Although most primitives are recognized in *Geomagic*, there are still issues to address. One of them is misrepresented profile. One example is that a straight line in a sketch profile may be recognized as a circular arc with a large radius, as shown in Fig. 9(b). (this was found only after exporting the solid model to *SolidWorks*). The sketch profile will have to be carefully inspected to make necessary corrections, as well as adding dimensions and constraints to parameterize the profile. Unfortunately, such inspections cannot be carried out unless the solid model is exported to supported CAD systems. Lack of CAD-like capability severely restricts the usability of the solid models in *Geomagic*, let alone the insufficient ability for primitive surface recognition.

5.2 *Rapidform XOR3*

Rapidform offers much better capabilities than *Geomagic* for parametric solid modeling. Excellent CAD-like capabilities, including feature tree, are available to the users. These capabilities allow users to create solid models and make design changes directly in *Rapidform*. For example, users will be able to

create a sketch profile by intersecting a plane with polygon mesh, and extrude the sketch profile to match the bounding polygon mesh for a solid feature. On the other hand, with the feature tree users can always roll back to previous entities and edit dimensions or redefine section profiles. These excellent capabilities make *Rapidform* particularly suitable for parametric solid modeling. *Rapidform* offers two methods for solid modeling, *Sketch*, and *Wizard*, which offers fast and easy primitive recognition from segmented mesh. The major drawback of the *Wizard* is that some guide curves and profile sketches generated are non-planar spline curves that cannot be parameterized. Users can use either or both methods to generate solid features in a single part.

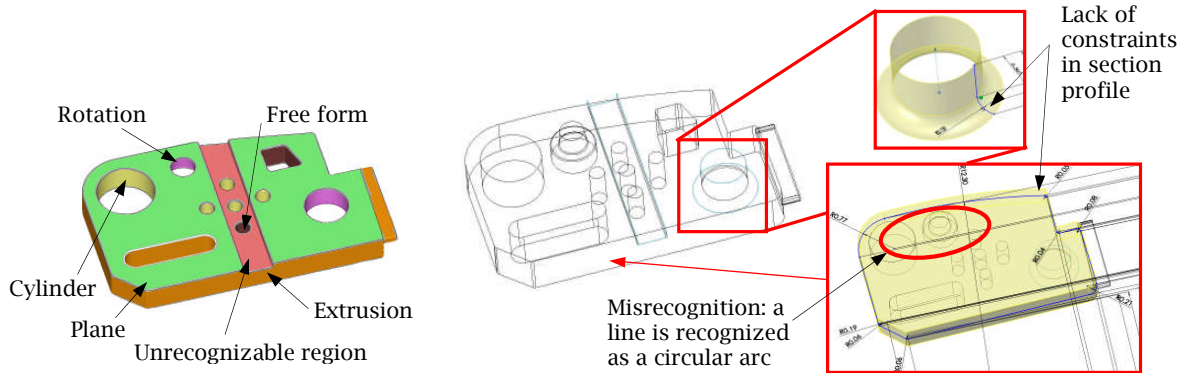


Fig. 9: Primitive surfaces recognized in *Geomagic*, (a) recognized regions, and (b) extracted primitive surfaces in *SolidWorks*.

5.2.1 Method 1: Sketch

In general, there are six steps employed in using the sketch method, (1) creating reference sketch plane, (2) extracting sketch profile by intersecting the sketch plane with the polygon mesh, (3) converting extracted geometric entities (usually as planar spline curves) into standard line entities, such as arcs and straight lines, (4) parameterizing the sketch by adding dimensions and constraints, (5) extruding, revolving, or lofting the sketches to create solid features; and (6) employing Boolean operations to union, subtract, or intersect features if necessary.

Rapidform provides *Auto Sketch* capability that automatically converts extracted spline curves into lines, circles, arcs, and rectangles, with some constraints added. Most constraints and dimensions will have to be added interactively to fully parameterize the sketch profile. Steps 4 to Step 6 are similar to conventional CAD operations. With excellent capabilities offered by *Rapidform*, fully constrained parametric solid models can be created efficiently.

For the block example, a plane that is parallel to the top (or bottom) face of the base block was created first (by simply clicking more than three points on the surface). The plane is offset vertically to ensure a proper intersection between the sketch plane and the polygon mesh. The geometric entities obtained from the intersection are planar spline curves. The *Auto Sketch* capability of *Rapidform* can be used to extract a set of standard CAD-like line entities to best fit the spline curves. These standard line entities can be joined and parameterized by manually adding dimensions and constraints for a fully parameterized section profile, as shown in Fig. 10(a). Once the sketch profile is parameterized, it can be extruded to generate an extrusion feature for the base block (Fig. 10(b)). The same steps can be followed to generate more solid features, and Boolean operations can be employed to union, subtract, or intersect solid features for a fully parameterized solid model. The final solid model is analyzed by using *Accuracy Analyzer*. The solid model generated is extremely accurate, where geometric error measured in average and standard deviation is 0.0002 and 0.0017 in., respectively (between the solid model and point cloud). Since the model is fully parameterized, it can be modified by simply changing the dimensions. For example, the length of the base block can be increased for an extended model, as shown in Fig. 10(c).

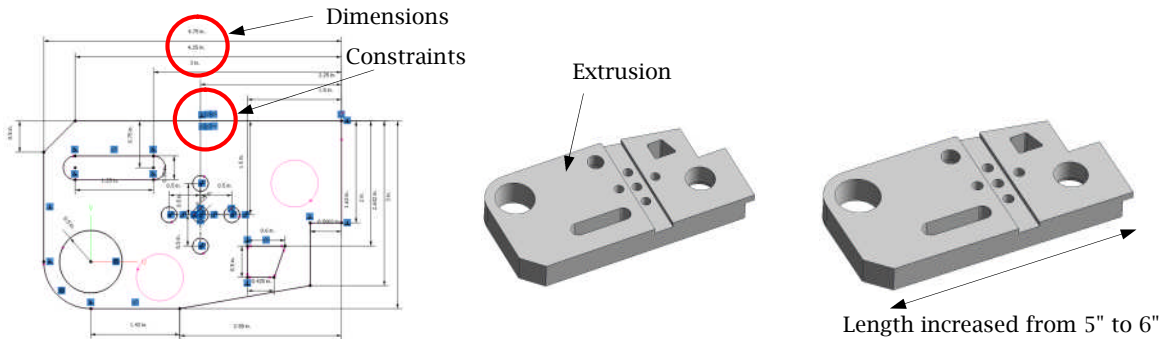


Fig. 10: A parametric solid model of the block example created using *Rapidform*, (a) fully parameterized section sketch, (b) extrusion for the base block, and (c) design change.

5.2.2 Method 2: Wizard

Wizard, or *Modeling Wizard*, of *Rapidform* automatically extracts *Wizard* features such as extrude, revolve, pipe, and loft, etc., to create solid models from segmented regions. Note that a *Wizard* feature (terminology employed in *Rapidform*) can be a surface (such as pipe) or a solid feature. There are five *Wizard* features provided: *extrusion*, *revolution* for extracting solid features; and *sweep*, *loft*, and *pipe* for surface features. There are three general steps to extract features using *Wizard*, (1) select mesh segments to generate individual features using *Wizard*, (2) modify the dimensions or add constraints to the sketches extracted in order to parameterize the sketches, and (3) use Boolean operations to union, subtract, or intersect individual features for a final model if needed.

A tubing example shown in Fig. 11. is employed to illustrate the capabilities offered in *Wizard*. We start with a polygon mesh that has been segmented, as shown in Fig. 11(a). First, we select the exterior region of the main branch and choose *Pipe Wizard*. *Rapidform* uses a best fit pipe surface to fit the main branch automatically, as shown in Fig. 11(b). Note that the *Pipe Wizard* generates section profile and guide curve as spatial (non-planar) spline curves, which cannot be parameterized. Also, wall thickness has to be added to the pipe to complete the solid feature. Next, we choose *Revolution Wizard* to create revolved features for the top and bottom flanges, as shown in Fig. 11(c). Note that each individual features are extracted separately. They are not associated. Boolean operations must be applied to these decoupled features for a final solid model.

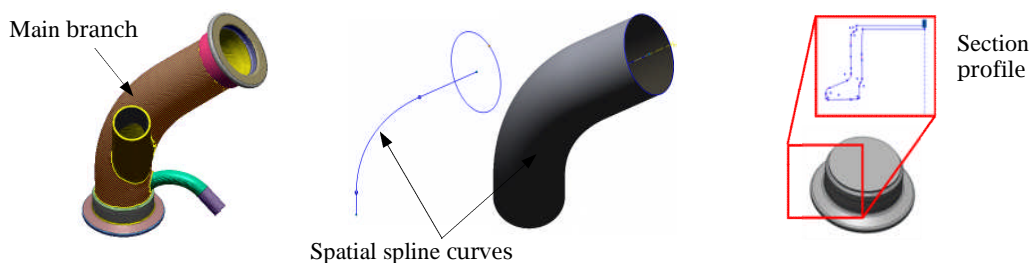


Fig. 11: Feature extraction for the tubing example using *Wizard*, (a) selected main branch region, (b) surface created using *Pipe Wizard*, and (c) flange created using *Revolution Wizard*.

Although *Wizard* offers a fast and convenient approach for solid modeling, the solid models generated are often problematic. The solid models have to be closely examined for validation. For example, in this tubing model, there are gap and interference between features, as indicated in Fig. 12. This is not a valid solid model. It is inflexible to edit and make changes to the *Wizard* features since the sketch profile is represented in spatial spline curves that cannot be constrained or dimensioned.

In summary, *Rapidform* is the only reverse engineering software that supports for creating parametric solid models from scanned data. *Rapidform* offers CAD-like capabilities that allow users to

add dimensions and constraints to sketches and solid features for a fully parametric solid model. In addition, *Rapidform* provides two modeling methods, *Sketch* and *Wizard*. Design intent and model accuracy can be achieved using the *Sketch* method, which is in general a much better option for creating parametric solid models.



Fig. 12: Gap and interference between solid features in the tubing model

5.3 Solid Model Translations

The solid models created in specialized software, such as *Rapidform* and *Geomagic*, have to be translated to mainstream CAD systems in order to support engineering applications. Both *Rapidform* and *Geomagic* offer capabilities that export solid models to numerous CAD systems.

5.3.1 Parametric Exchange of Geomagic

The solid model of the block example created in *Geomagic* was exported to *SolidWorks* and *Wildfire* using *Parametric Exchange of Geomagic*. For *SolidWorks*, all seventeen features recognized in *Geomagic* (see Fig. 13(a).) were translated as individual features, as shown in Fig. 13(b). Note that since there are no Boolean operations offered in *Geomagic Studio* v.11, these features are not associated. There is no relation established between them. As a result, they are just "piled up" in the solid model shown in Fig. 13(c). Subtraction features, such as holes and slots, simply overlap with the base block. Similar results appear in *Wildfire*, except that one extrusion feature was not exported properly, as shown in Fig. 13(d). and 13(e).

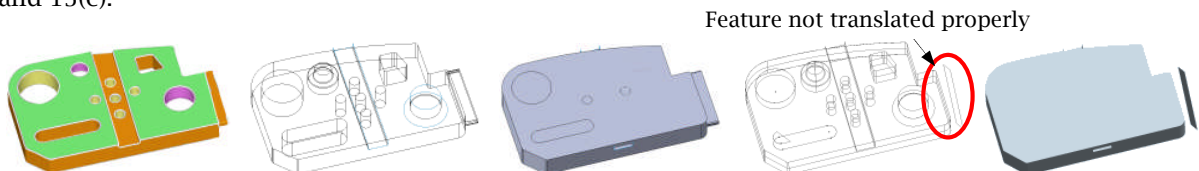


Fig. 13: The block model explored to *SolidWorks* and *Wildfire*, (a) seventeen features recognized in *Geomagic*, (b) features exported to *SolidWorks* (wireframe), (c) features "piled up" in *SolidWorks*, (d) features exported to *Wildfire* (wireframe), and (e) features "piled up" in *Wildfire*.

5.3.2 liveTransfer™ module of Rapidform XOR3

The *liveTransfer™* module of *Rapidform XOR3* exports parametric models, directly into major CAD systems, including *SolidWorks* 2006+, *Siemens NX* 4+, *Pro/ENGINEER Wildfire* 3.0+, *CATIA* V4 and V5 and *AutoCAD*.

The block example that was fully parameterized in *Rapidform* was first exported to *SolidWorks*. All the solid features were seamlessly exported to *SolidWorks*, except for some datum entities, such as datum points. Since entities such as polygon mesh and segmented regions are not included in *SolidWorks* database, they cannot be exported. As a result, geometric datum features associated with these entities are not exported properly. The dimensions and constraints added to the sketches and solid features in *Rapidform* are exported well, except again for those referenced to entities that are not available in *SolidWorks*. Fortunately, it only requires users to make a few minor changes (such as adding or modifying dimensions or constraints) to bring back a fully parametric solid model in *SolidWorks*. As shown in Fig. 14., the length of the base block was increased and the solid model is rebuilt in *SolidWorks* (Fig. 14(b)). Similar translation results were observed in *NX*. However, model

translation to *Wildfire* 4.0 is problematic, in which numerous issues, such as missing and misinterpretation portion of the section profile, are encountered. In general, parametric solid models created in *Rapidform* can be exported well to *SolidWorks* and *NX*. The translation is almost seamless. Although, there were minor issues encountered, such as missing references for some datum points, those issues can be fixed very easily.

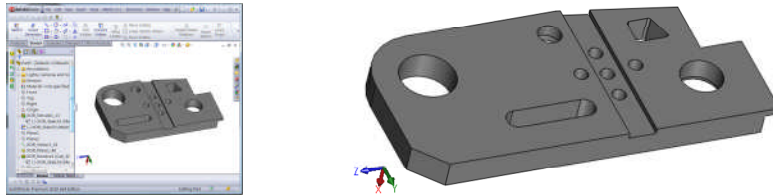


Fig. 14: Block exported from *Rapidform* to *SolidWorks*, (a) solid model exported to *SolidWorks*, and (b) design change made in *SolidWorks*.

6 OBSERVATIONS AND CONCLUSIONS

In this paper, technology that enables 3D shape engineering and design parameterization for reverse engineering was briefly reviewed. Software that offers such capabilities was also evaluated and tested using practical examples. Based on the evaluations, we observed that **Rapidform is the only viable choice for parametric solid modeling** in support of 3D shape engineering and design parameterization. *Rapidform* offers CAD-like capabilities for creating solid features, feature tree for allowing roll back for feature editing, and excellent sketching functions. In addition, the *liveTransfer™* module offers model exporting to mainstream CAD systems almost seamlessly.

After research and development in decades, technology that supports 3D shape engineering and design parameterization is matured enough to support general engineering applications. The ideal scenario can now be realized by using software such as *Rapidform* for shape engineering and parameterization, where labor intensive tasks, such as managing point cloud, triangulation, etc., is taken care of in an automated fashion; and design intents can be recovered interactively as desired. One area that might require more work is to incorporate more CAD packages for model export. Major CAD packages, such as *SolidWorks* and *NX*, have been well supported. However, software such as *CATIA* is yet to be included and software like *Wildfire* needs to be streamlined.

ACKNOWLEDGEMENT

This study was part of a reverse engineering project supported by U.S. Air Force and DRS Technologies under Reference SOW # QIB09-008. The authors appreciate the opportunity for conducting the study.

REFERENCES

- [1] Blais, F.: Review of 20 Years of Range Sensor Development, *Journal of Electronic Imaging*, 13(1), 2004, 231-240. DOI:10.1117/1.1631921
- [2] ZScanner 800, <http://www.zcorp.com>, Z Corporation.
- [3] Geomagic, <http://www.geomagic.com>, Geomagic Inc.
- [4] Rapidform, <http://www.rapidform.com>, INUS Technology Inc.
- [5] PolyWorks, <http://www.innovmetric.com>, InnovMetric Software Inc.
- [6] SolidWorks, <http://www.solidworks.com>, SolidWorks Corp.
- [7] Chang, K.H.; Magdum, S.; Khera, S.; Goel, V.K.: An Advanced Computer Modeling and Prototyping Method for Human Tooth Mechanics Study, *Annals of Biomedical Engineering*, 31(5), 2003, 621-631. DOI:10.114/1.1568117
- [8] Sun, Q.; Chang, K.H.; Dormer, K.; Dyer, R.; Gan, R.Z.: An Advanced Computer-Aided Geometric Modeling and Fabrication Method for Human Middle Ear, *Medical Engineering and Physics*, 24(9), 2002, 595-606. DOI:10.1016/S1350-4533(02)00045-0

- [9] Liu, Y.; Dong, X.; Peng, W.: Study on Digital Data Processing Techniques for 3D Medical Model, *Bioinformatics and Biomedical Engineering*, 4, 2010, 1-4. DOI:10.1109/ICBBE.2010.5518168
- [10] Lv, Y.; Yi, J.; Liu, Y.; Zhao, L.; Zhang, Y.; Chen, J.: Research on Reverse Engineering for Plastic Operation, *Information Technology and Applications*, 2009, 389-391. DOI: 10.1109/IFITA.2009.123
- [11] Raja, V.; Fernandes, K.J.: *Reverse Engineering: An industrial Perspective*, Springer-Verlag, London, 2008. DOI:10.1007/978-1-84628-856-2
- [12] Silva, J.S.; Chang, K.H.: Design Parameterization for Concurrent Design and Manufacturing of Mechanical Systems, *Concurrent Engineering Research and Applications (CERA) Journal*, 2002, 10(1), 3-14. DOI:10.1177/1063293X02010001048
- [13] Lorensen, W.E.; Cline, H.E.: Marching Cubes: A High Resolution 3D Surface Construction Algorithm, *Computer Graphics*, 21(4), 1987. DOI:10.1145/37402.37422
- [14] Edelsbrunner, H.; Kirkpatrick, D.G.; Seidel, R.: On the Shape of A Set of Points In The Plane, *IEEE Transactions on Information Theory*, 29(4), 1983, 551-559. DOI:10.1109/TIT.1983.1056714
- [15] Bernardini, F.; Mittleman, J.; Rushmeier, H.; Silva, C.; Taubin, G.: The Ball-Pivoting Algorithm for Surface Reconstruction, *Visualization and Computer Graphics*, 5(4), 1999, 349-359. DOI:10.1109/2945.817351
- [16] Kazhdan, M.; Bolitho, M.; Hoppe, H.: Poisson Surface Reconstruction, *The Fourth Eurographics Symposium on Geometry Processing*, 2006.
- [17] Cuccuru, G.; Gobbetti, E.; Marton, F.; Pajarola, R.; Pintus, R.: Fast Low-Memory Streaming MLS Reconstruction of Point-Sampled Surfaces, *Graphics Interface*. 2009, 15-22.
- [18] Besl, P.J.; Jain, R.C.: Segmentation Through Variable-Order Surface Fitting, *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 10(2), 1988, 167-192. DOI: 10.1109/34.3881
- [19] Alrashdan, A.; Motavalli, S.; Fallahi, B.: Automatic Segmentation of Digitized Data for Reverse Engineering Applications, *IIE Transactions*, 32(1), 2000, 59-69. DOI: 10.1023/A:1007655430826
- [20] Huang, J.; Menq, C.-H.: Automatic Data Segmentation for Geometric Feature Extraction From Unorganized 3-D Coordinate Points, *IIE Transactions on Robotics and Automation*, 17(3), 2001, 268-279. DOI:10.1109/70.938384
- [21] Várady, T.; Benkő, P.; Kós, G.: Reverse Engineering Regular Objects: Simple Segmentation and Surface Fitting Procedures, *International Journal of Shape Modeling*, 4(3-4), 1998, 127-141. DOI:10.1142/S0218654398000106
- [22] Vanco, M.; Brunnett, G.: Direct Segmentation of Algebraic Models for Reverse Engineering, *Computing*, 72(1-2), 2004, 207-220. DOI:10.1007/S00607-003-0058-7
- [23] Várady, T.; Martin, R.R.; Cox, J.: Reverse Engineering of Geometric Models - An Introduction, *Computer-Aided Design*, 29(4), 1997, 255-268. DOI:10.1016/S0010-4485(96)00054-1
- [24] Marshall, D.; Lukacs, G.; Martin, Ralph.: Robust Segmentation of Primitives from Range Data in the Presence of Geometric Degeneracy, *IEEE Transaction on Pattern Analysis and Machine Intelligence*, 23(3), 2001, 304-314. DOI:10.1109/34.910883
- [25] Lukács, G.; Martin, R.; Marshall, D.: Faithful Least-Squares Fitting of Spheres, Cylinders, Cones and Tori for Reliable Segmentation, *Lecture Notes in Computer Science*, 1406, 1998, 671-686. DOI:10.1007/BFb0055697
- [26] Tsai, Y.C.; Huang, C.Y.; Lin, K.Y.; Lai, J.Y.; Ueng, W.D.: Development of Automatic Surface Reconstruction Technique in Reverse Engineering, *The International Journal of Advanced Manufacturing Technology*, 42(1-2), 2009, 152-167. DOI:10.1007/S00170-008-1586-2
- [27] Thompson, W.B.; Owen, J.C.; de St. Germain, H.J.; Stark, S.R., Jr.; Henderson, T.C.: Feature-Based Reverse Engineering of Mechanical Parts, *IEEE Transactions on Robotics and Automation*, 15(1), 1999, 57-66. DOI:10.1109/70.744602
- [28] Venkataraman, S.; Sohoni, M.; Kulkarni, V.: A Graph-Based Framework for Feature Recognition, *Sixth ACM Symposium on Solid Modeling and Applications*, 2001, 194-205. DOI:10.1145/376957.376980
- [29] Geometric Software Solutions, <http://www.geometricglobal.com>, Geometric Ltd.
- [30] TransMagic, <http://www.transmagic.com>, TransMagic, Inc.
- [31] Chang, K.H. and Chen, C., Research and Recommendation of Advanced Reverse Engineering Tools, Final Technical Report, Reference SOW # QIB09-008, September 2010.